

Portable Neutron Survey Meter


NSN3



- | Lightweight
- | No ^3He or BF_3
- | Wide Range Measurement
- | 3-Way Power Supply

Specifications

[Standard]	Compliant with IEC61005(2003) and JIS Z4341(2006)
[Radiation Measured]	Neutron H*(10)
[Detector]	Gas detector
[Measurement Range]	Dose rate: 0.01 μ Sv/h to 99.99 mSv/h (1 μ rem/h to 9.99 rem/h) Dose: 0.01 μ Sv to 99.99 mSv (1 μ rem to 9.99 rem)
[Accuracy]	Dose rate: $\leq \pm 20\%$ at 10 μ Sv/h (1 mrem/h) Dose: $\leq \pm 20\%$ at 1 μ Sv (0.1 mrem)
[Energy Range]	0.025 eV to 15 MeV
[Energy Dependency]	ICRP74 compliance(Response Curve of H*(10)/ ϕ)
[Angular Dependence]	$\leq \pm 25\%$ (± 90 degree from standard direction)
[Linearity]	$\leq \pm 20\%$ (10 μ Sv/h(1 mrem/h) reference)
[Gamma-ray Sensitivity]	$\leq \pm 1\%$ of indication at 10 mSv/h(1 rem/h)
[Display]	Five-digit Display (Dose rate, Accumulated dose)
[Communication]	Dose Rate, Accumulated Dose, Trend Data, Configuration Setting Data. (USB cable and software)
[Data Storage]	Number of Data Records: Up to 1200 Storage Cycle: 10, 20, 30, 60, 120, 300 or 600 seconds(selectable)
[Power Supply]	Primary battery or secondary battery (AA type x 6) AC adaptor (IN: 100 to 240 V AC)(option)
[Battery Life]	Up to 30 hours (depends on display condition)
[Operating Temperature]	-10°C to 45°C (14°F to 113°F)
[Operating Humidity]	35 to 90 %RH (non-condensing)
[Dimensions]	289.5(L) x 164(W) x 246(H) mm (11.4(L) x 6.5(W) x 9.7(H) in)
[Weight]	3 kg / 7 lb approx.

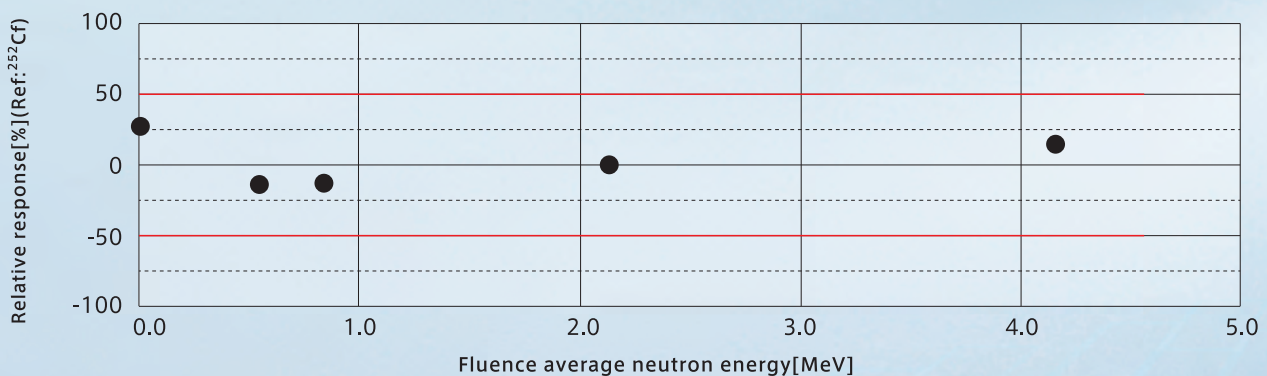

⚠ CAUTION

Read the instruction manual provided before using this product, to make sure you operate it safely.



Headquarters sales Dept. III
Global Energy Div. Sales Group

Gate City Ohsaki, East Tower, 11-2, Osaki 1-chome, Shinagawa-ku, Tokyo 142-0032, Japan
Phone: +81-3-5435-7276, FAX: +81-3-5435-7436 <http://www.fujielectric.com/products/radiation/>

Information in this sheet is subject to change without notice due to the product improvement.

Printed in Japan DEC 2016.07